

Technical Data for Alkaline Dry Battery

Type: LR6

(Made in China)

2013/07/01

TOSHIBA HOME APPLIANCES CORPORATION

Battery Business Div.


Ratings

Battery System		Alkaline Dry Battery	
Item			
Battery Type		LR6	
Nominal Voltage		1.5V	
Standard Discharge Performance ※Initial		Discharge Condition (JIS/IEC)	Service Life
		(1) 3.9Ω 1h/day (End-Voltage:0.8V)	: 7.5 hours.
		(2) 10Ω 1h/day (End-Voltage:0.9V)	: 20.0 hours.
		(3) 43Ω 4h/day (End-Voltage:0.9V)	: 90 hours.
		(4) 250mA 1h/day (End-Voltage:0.9V)	: 7.3 hours.
Standard Weight		23g	
Terminals	Cap Terminals	Fe + Ni plate	
	Base Terminals	Fe + Ni plate	
Outer Dimensions	Overall Height	50.5(0/-1.3)mm	
	Diameter	φ14.5(0/-1.0)mm	
Usable Temperature Range		-10 ~ 45deg.C (If the operating temperature exceeds 40°C,the operating time shall be within 30 days.)	

(NOTE) *: " Initial" means performance within three months after production.

LR6 Load Resistance vs Service Life

Test Condition : Continuous Discharge, Initial, 20 deg.C

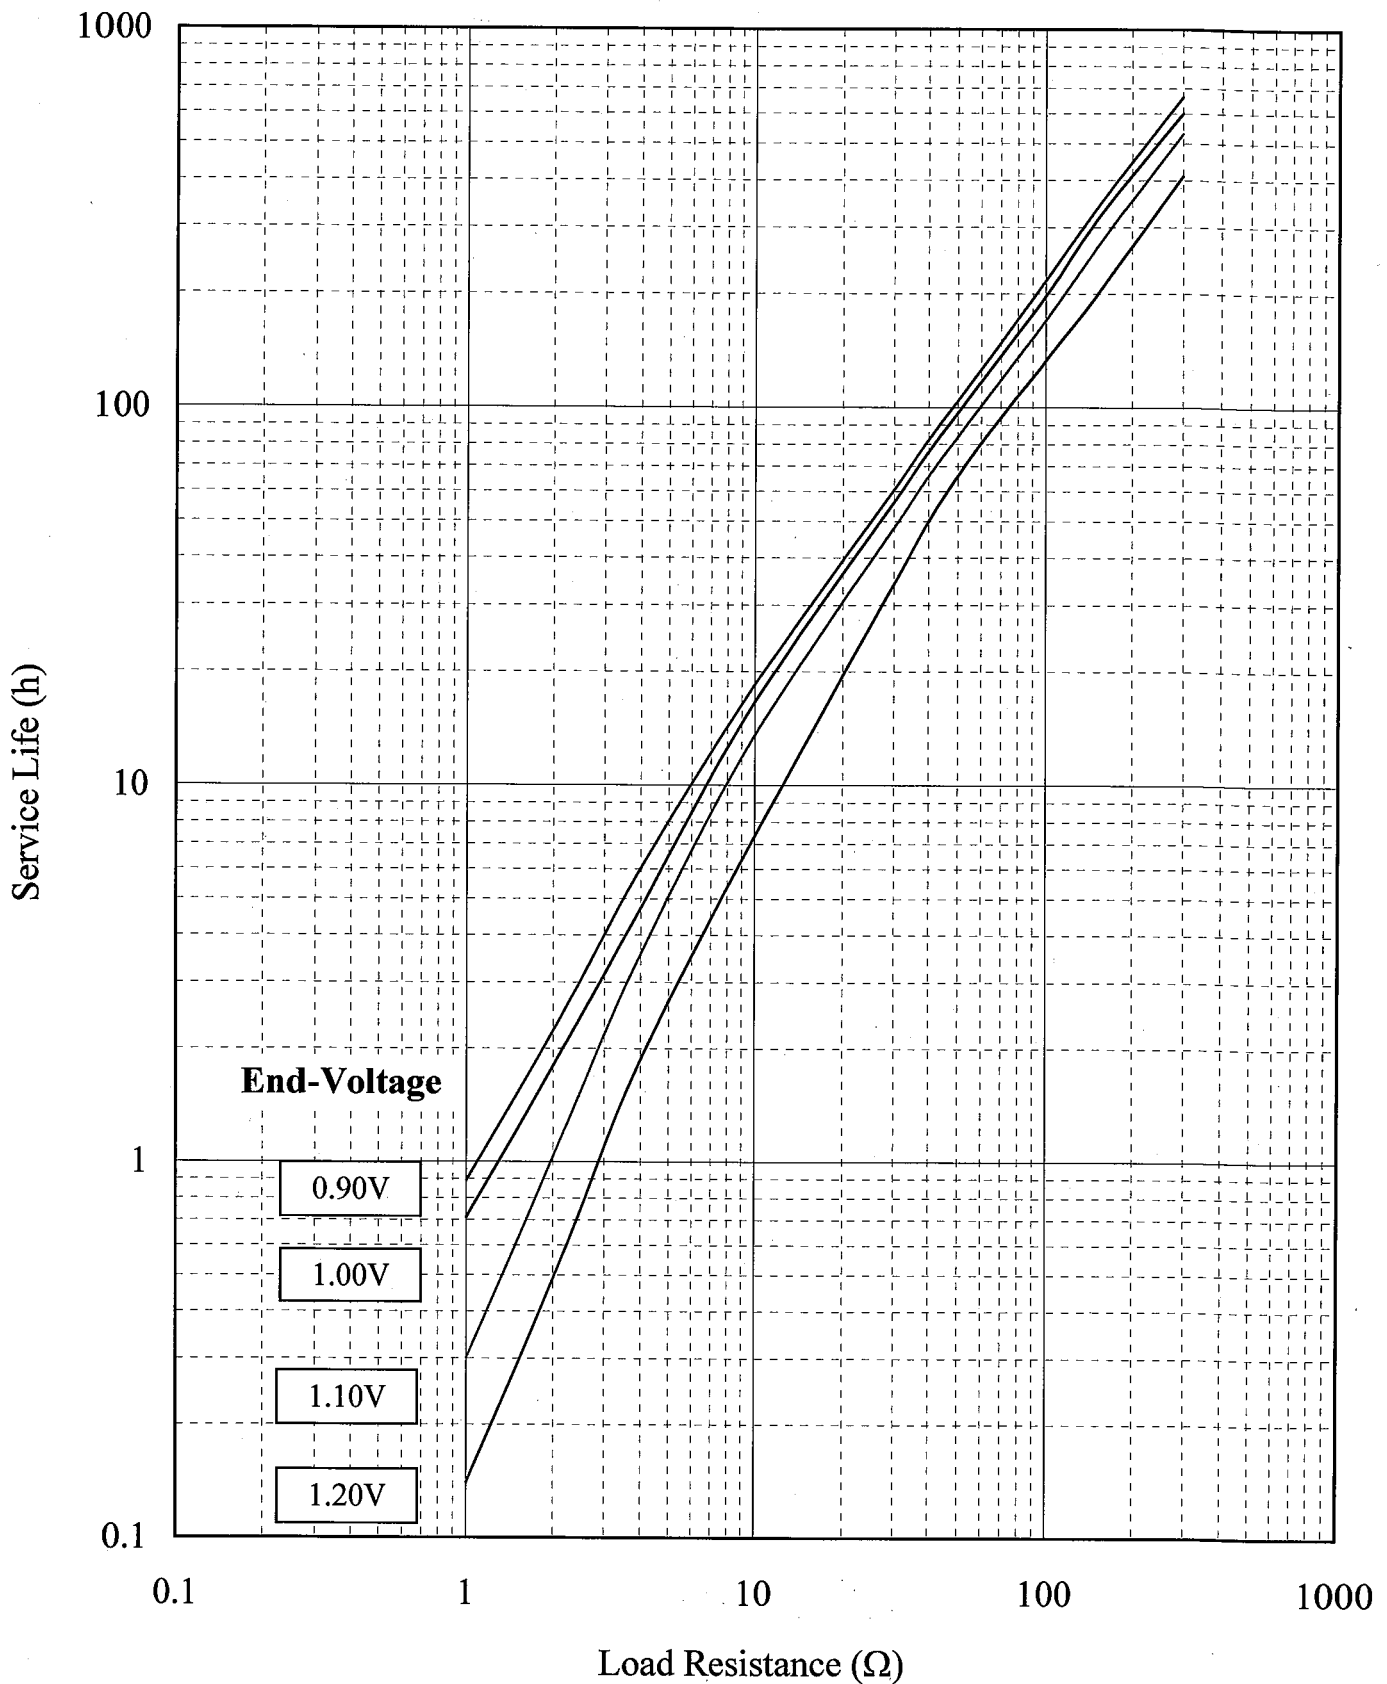


This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.

Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Discharge Characteristics

Test Condition : Continuous Discharge, Initial, 20deg.C

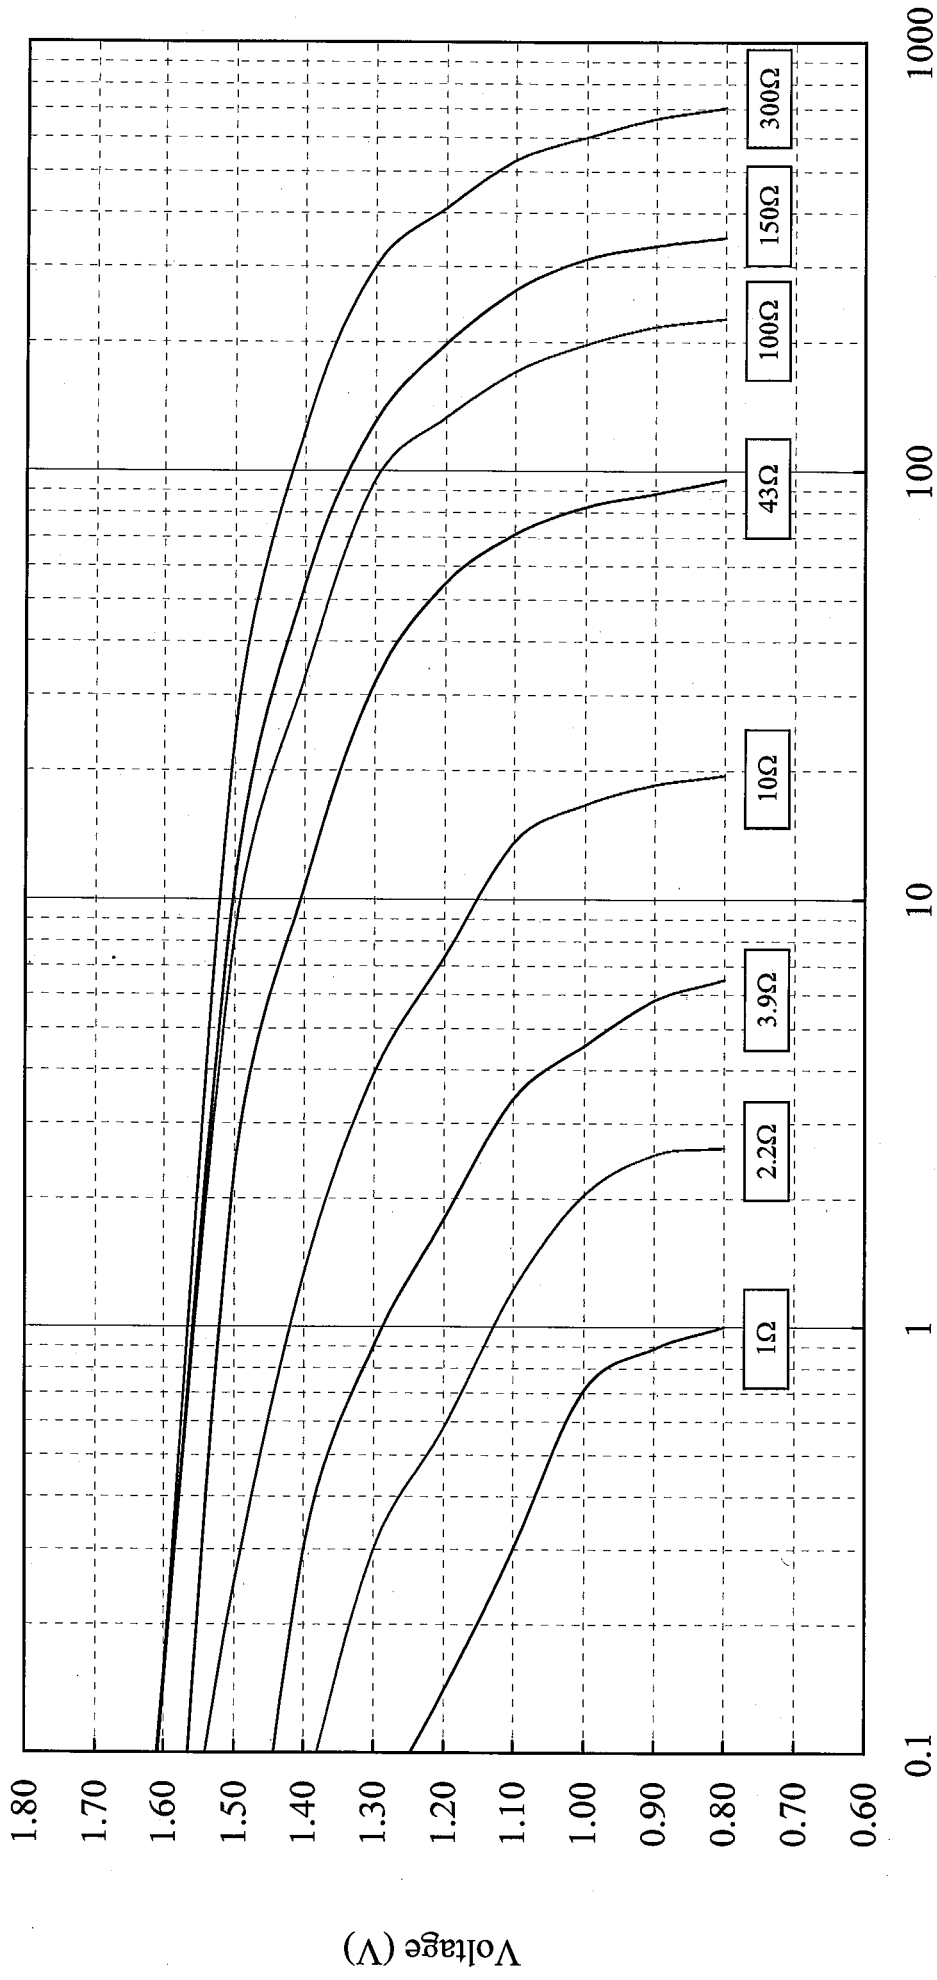


Service Life (h)

This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.

Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Discharge Characteristics

Test Condition: 10Ω Continuous Discharge, Initial

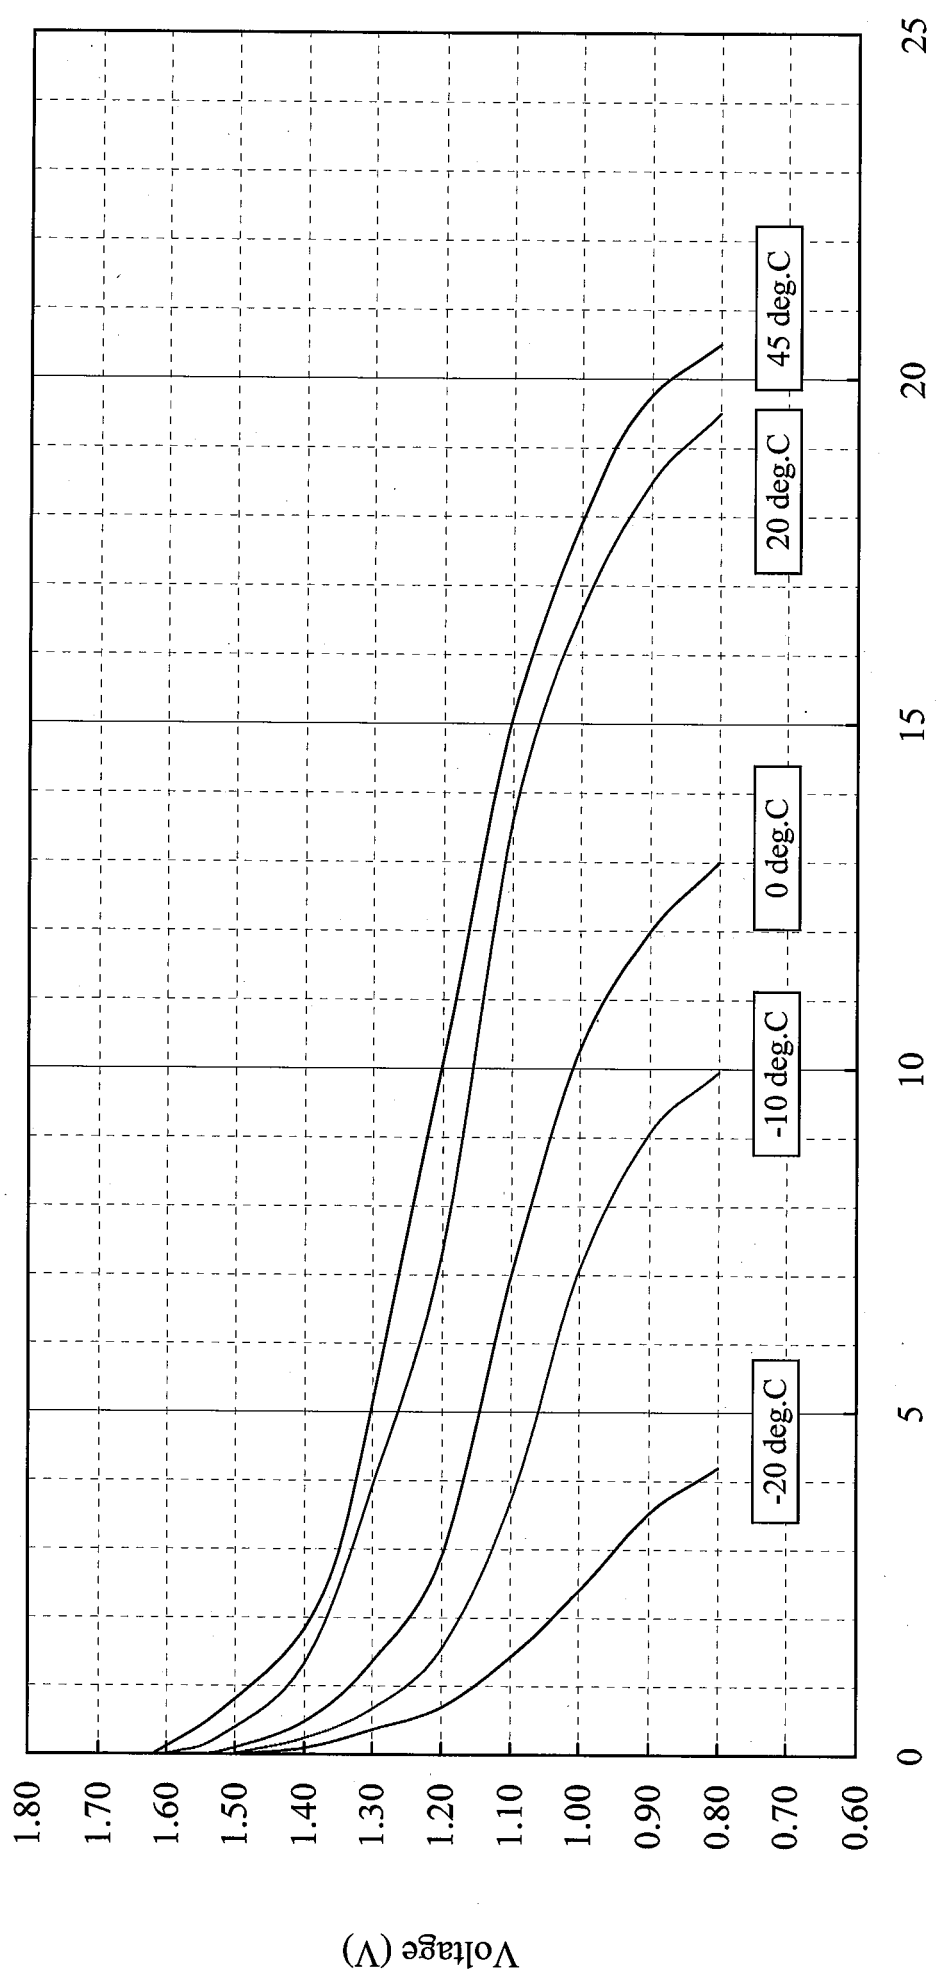


Service Life (h)

This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.

Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Discharge Current vs Service Life

Test Condition : Continuous Discharge, Initial, 20 deg.C

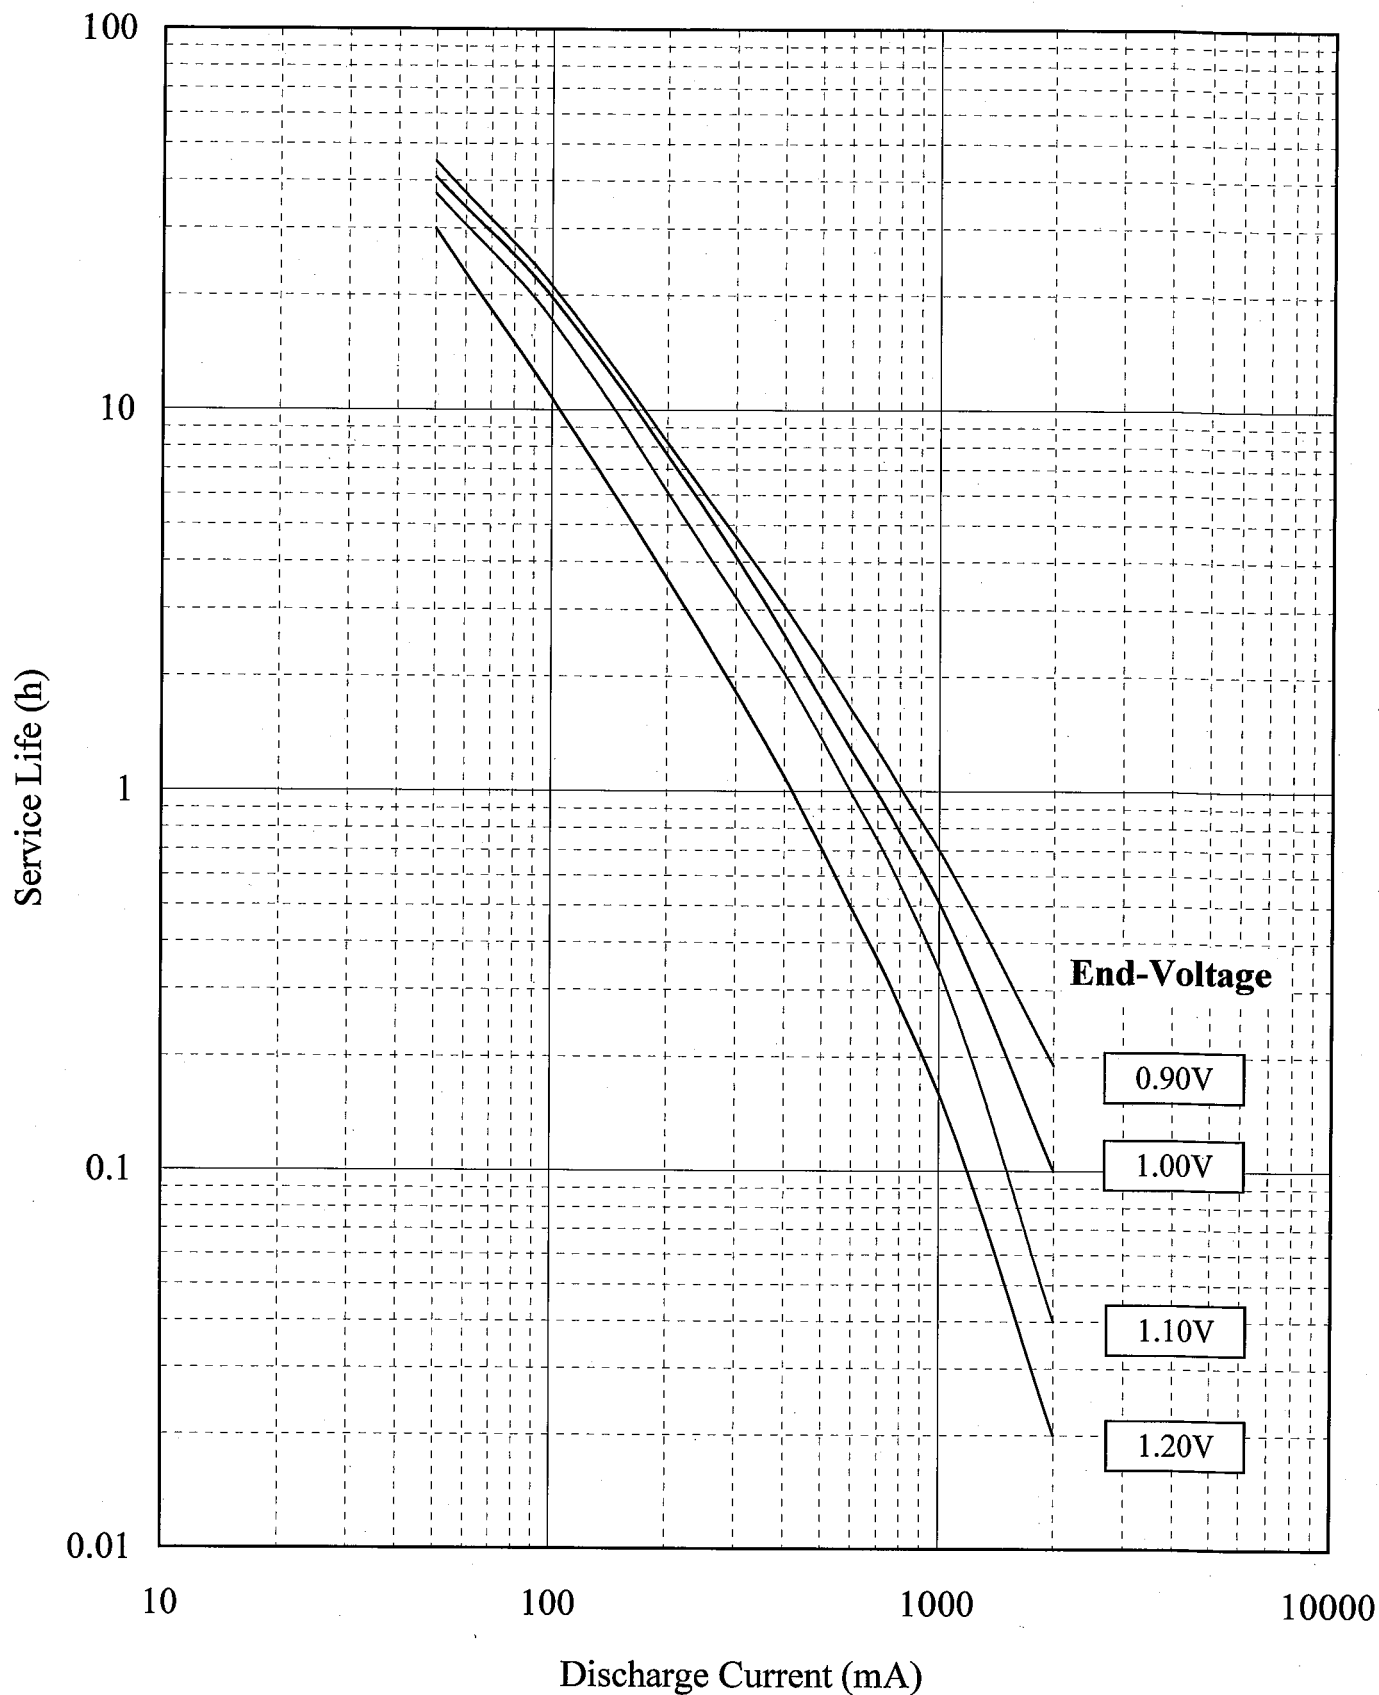


This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.

Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Discharge Current vs Capacity

Test Condition : Continuous Discharge, Initial, 20 deg.C

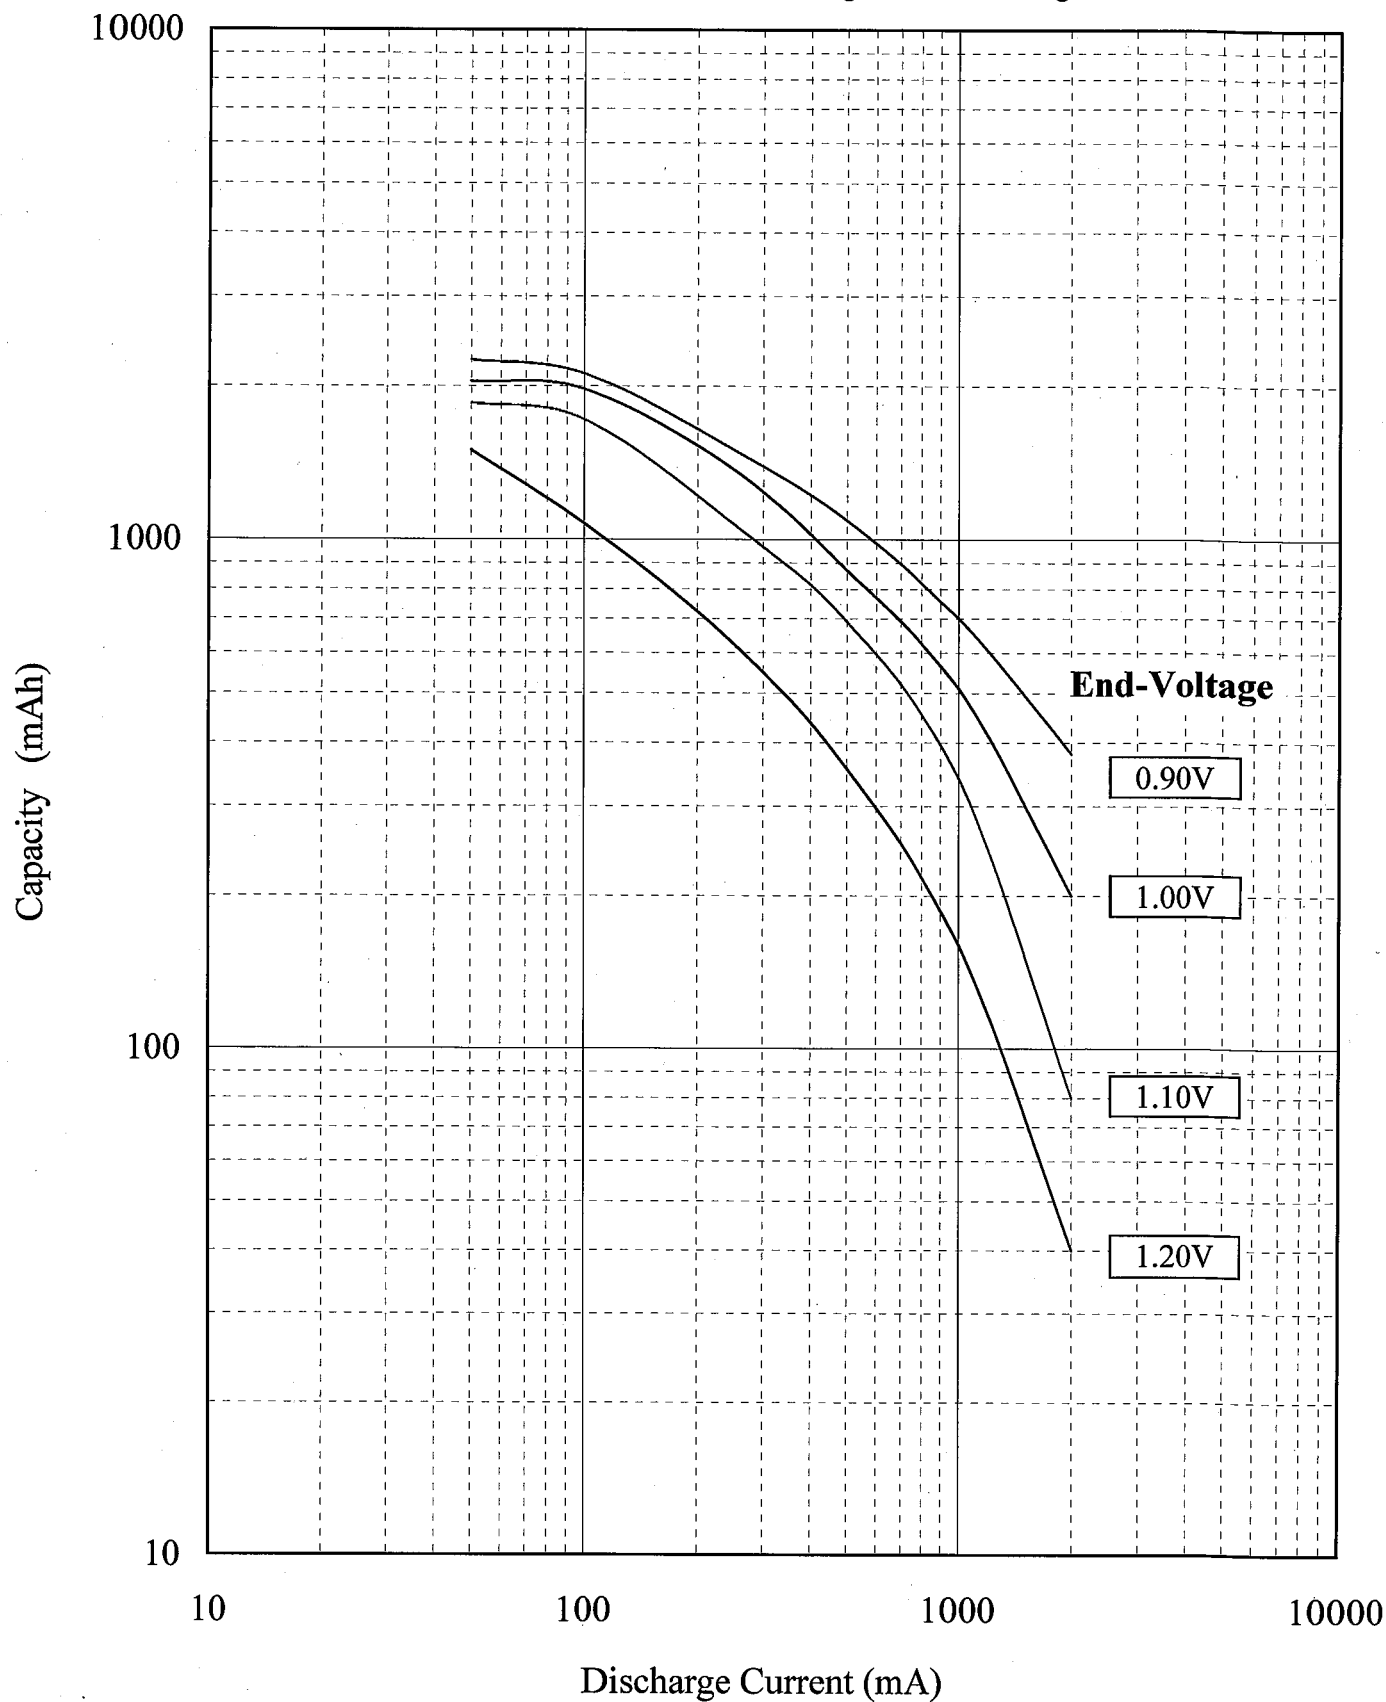


This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.

Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Discharge Characteristics

Test Condition: Continuous Discharge, Initial, 20deg.C

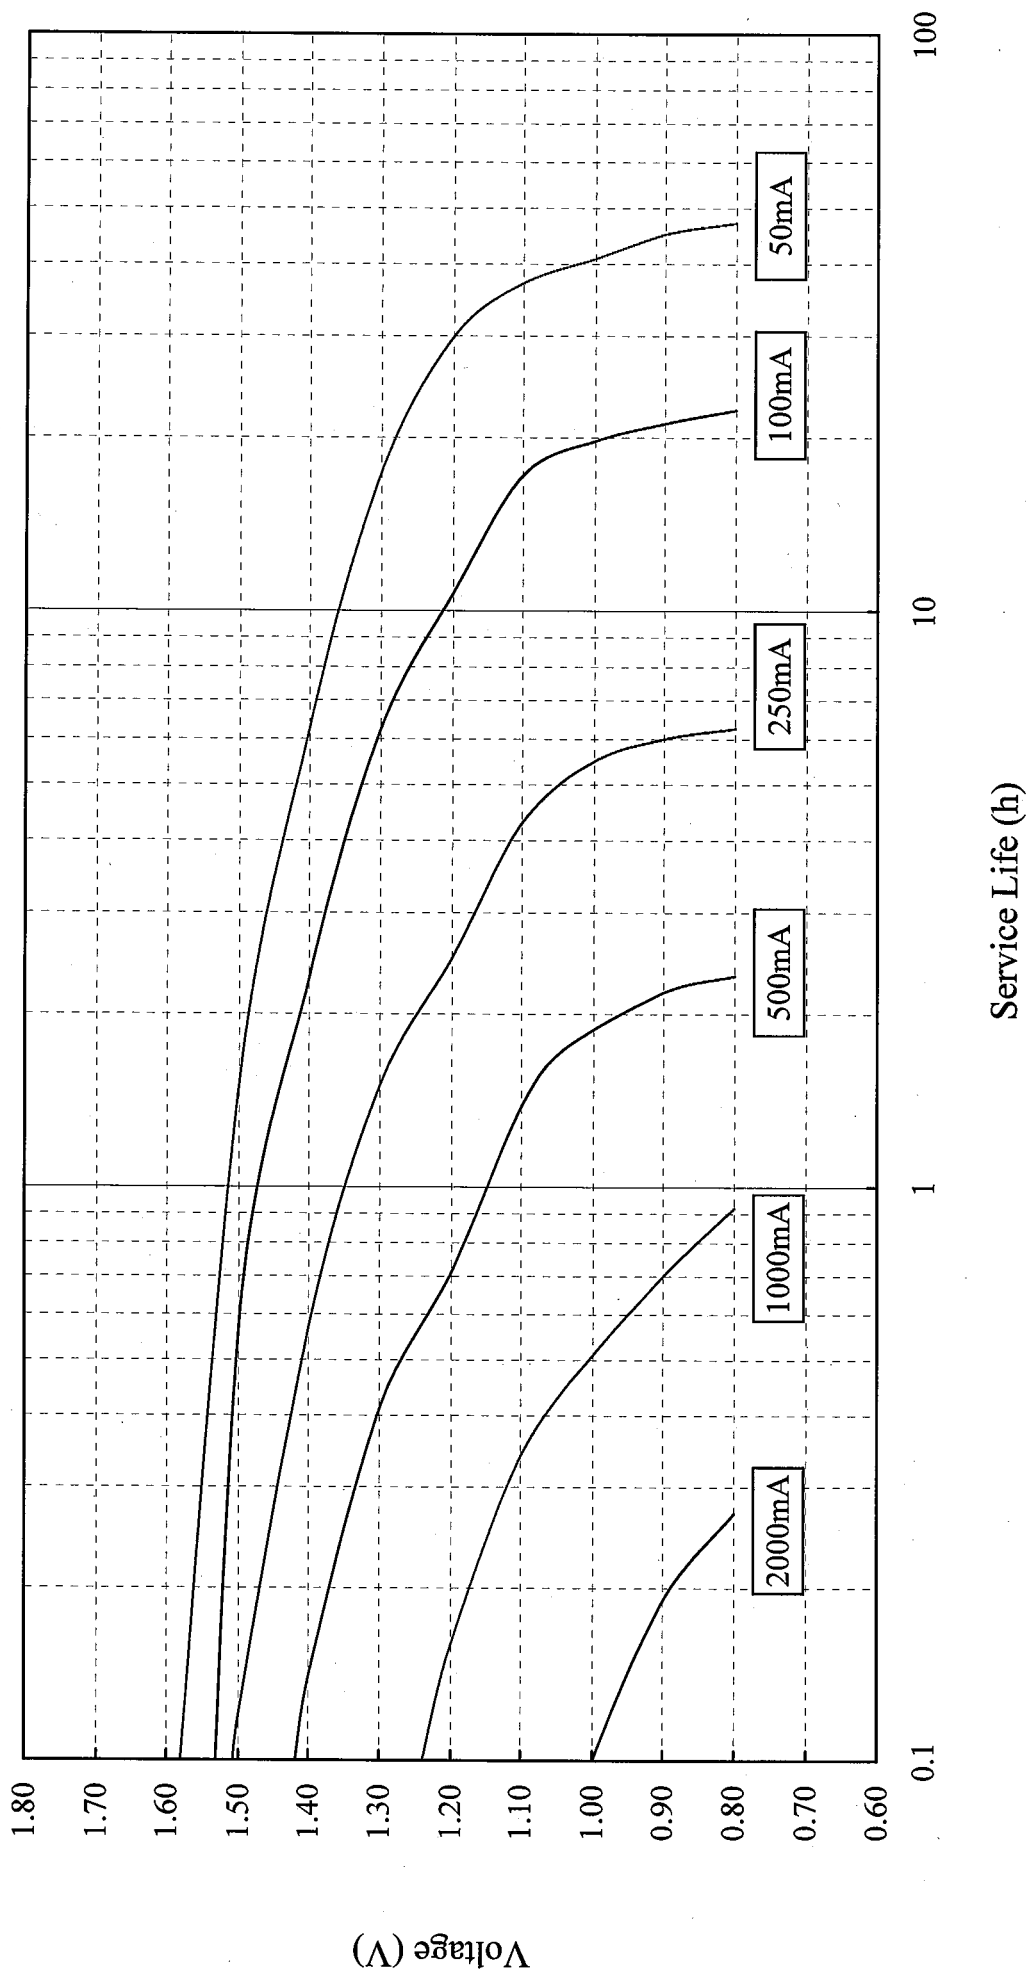


This is only for reference. (not guaranteed.) The information contained herein may be changed without prior notice.


Proprietary materials of TOSHIBA HOME APPLIANCES CORPORATION

LR6 Storage Characteristics

[①Discharge Condition: 10 Ω 1h/day End-Voltage 0.9V]

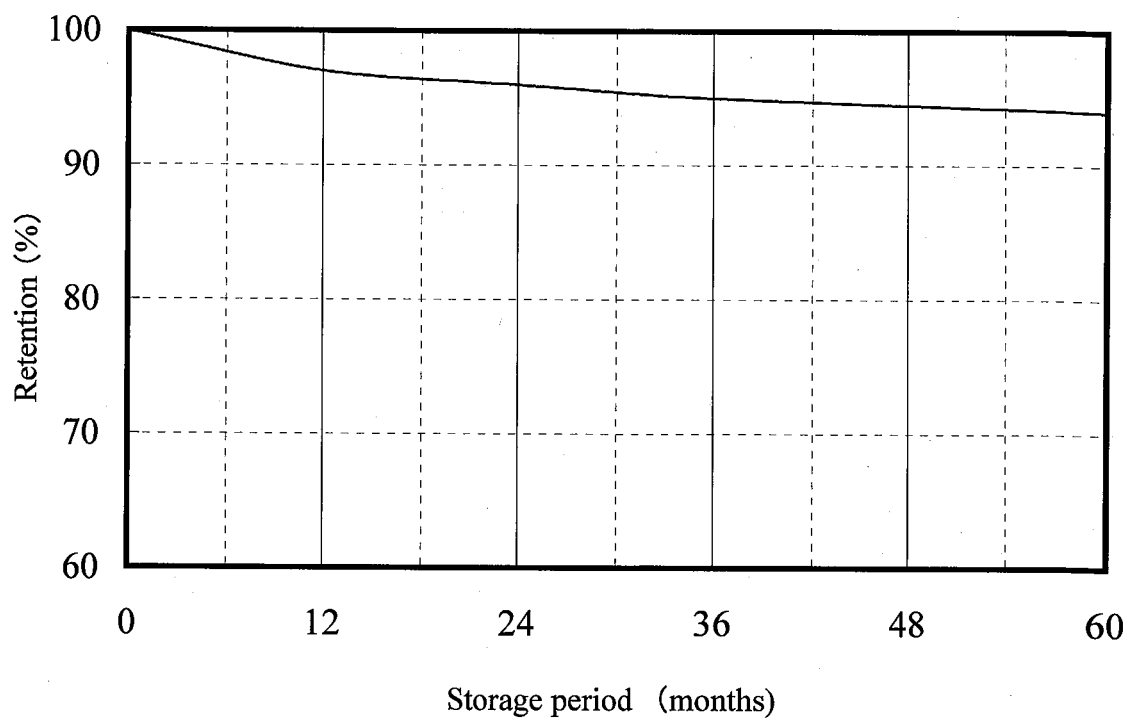

[②Discharge Condition: 43 Ω 4h/day End-Voltage 0.9V]

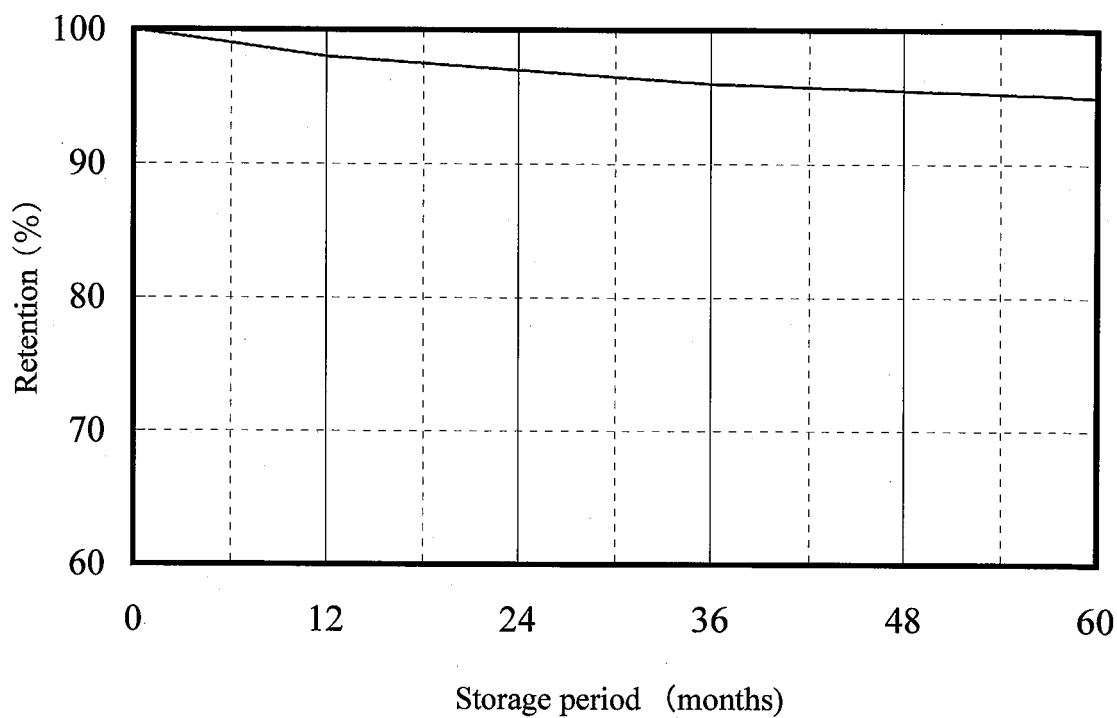


- [Note]
1. Discharge temperature, relative humidity: 20 $\pm$ 2 $^{\circ}$ C, (60 $\pm$ 15)%RH
 2. Storage temperature, relative humidity: 20 $\pm$ 2 $^{\circ}$ C, (60 $\pm$ 15)%RH
 3. Retention: Self-discharge rate

LR6 Leakage Performance

Test Items		Electrolyte Leakage (%)						
Test Condition	Storage Period	20days	40days	60days	90days	1year	2year	5years
	Room Temperature	0	0	0	0	0	0	0
Storage at High Temperature and High Humidity	45deg.C-70%RH	0	0	0	0	-	-	-
	60deg.C-90%RH	0	0	0	-	-	-	-

LR6 Battery Dimensions

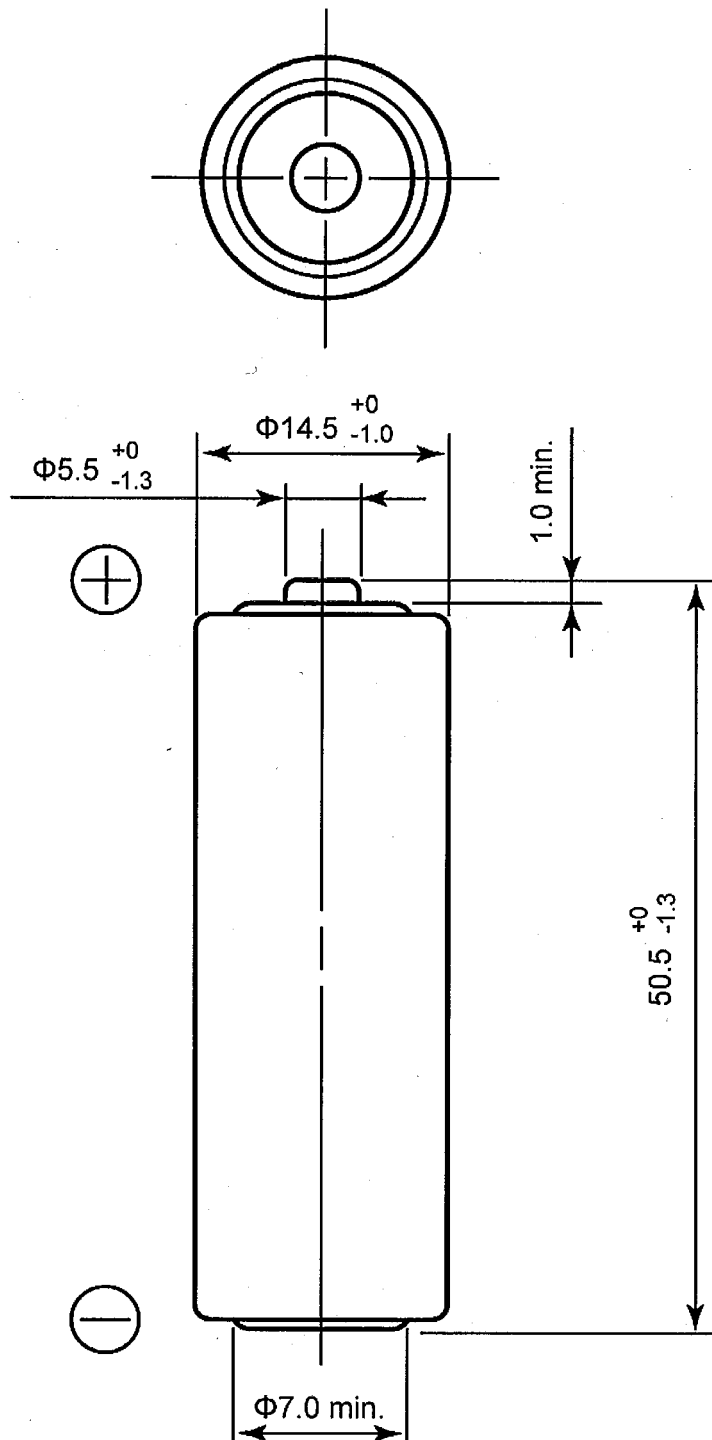

Unit: mm

Terminals: Positive-cap terminal

Negative-base terminal

Outer Shell: Shrink-Label